



September 2021

F. Ball and Co. Ltd.

# FLOORING

## INSTALLATION PRODUCTS

Flooring Adhesives

Floor Levelling Compounds

Waterproof Surface Membranes

Subfloor Preparation Products

Tapes Tools Accessories





# SPECIALIST PRODUCTS

## For the Global Flooring Industry

F. Ball is a recognised leader in the development and manufacture of floor adhesives and floor preparation products for specialist flooring contractors. The company's continued success is based on three underlying commitments, which aim to deliver ongoing customer satisfaction through optimised product performance and user experience.

**F. Ball is committed to:**

- **Researching, developing and manufacturing products that deliver world class performance**
- **Providing industry-leading service and support**
- **Rewarding customer loyalty**

This commitment is backed by a company that retains the values it had when it was first founded in 1886, taking a long-term view and building sustainable, trusting and mutually-beneficial partnerships with wholesalers, distributors and customers alike.

**GLOBAL OUTLOOK, LOCAL SERVICE**

Still a family-owned business, F. Ball has developed into a global operation, supplying products throughout Europe, Middle East, Africa, USA, Canada, South America and the Far East using an established network of specialist agents and distributors. Subsidiary company, F. Ball and Co. (Asia) Pte Ltd, based in Singapore, provides a dedicated service for customers in the Asia Pacific Rim region.

**QUALITY & PERFORMANCE**

Above all, it is the performance of the company's products that have established the F. Ball name as 'number one' in the development and manufacture of consistently high quality flooring adhesives, levelling compounds, waterproof surface membranes, primers and a wide selection of professional tools and accessories.

The company's commitment to maintaining the highest levels of quality and performance can be witnessed in its accreditation to international quality management and environmental standards ISO 9001 and ISO 14001, as well as ISO 45001, which specifies the best practice requirements for occupational health and safety management.



**MEETING DEMANDS**

In developing new products and improving existing ones, F. Ball makes a point of listening to contractor feedback to continually update the company's knowledge bank and ensure formulations meet the ever-changing needs of today's marketplace.

Over recent years, for example, the company has developed products that are low odour and solvent-free, as well as producing levelling compounds and adhesives that are suitable in biologically-sensitive areas such as those found in hospitals and other healthcare environments.

**COMMITMENT TO EXCELLENCE**

The company's iconic and unrivalled Recommended Adhesives Guide (RAG®) provides adhesive recommendations for over 6,000 brand name floor coverings from leading, international manufacturers. Every recommendation has been tested in F. Ball's advanced research and development laboratories and approved and endorsed by each individual floorcovering manufacturer.

It is this level of dedication and commitment to excellence that F. Ball applies to each product it develops, ensuring that products are optimised for ease of application, subfloor compatibility, and long-term durability.

**TRAINING & TECHNICAL SUPPORT**

A £1 million, purpose-built centre of excellence at F. Ball's main manufacturing site in Staffordshire offers new contractors the opportunity to learn the principles of floor preparation and effective application of F. Ball products, while providing refresher courses for established contractors, as well as introductory courses on newly-launched products.

This 'hands on', intensive training is supported by F. Ball's knowledgeable technical service team, who are contactable by phone, email and the F. Ball website, as well as via social media channels, such as twitter.



A  
**GREAT BRITISH  
COMPANY**



**TEXTILE**  
Flooring Adhesives  
4-9



**RESILIENT**  
Flooring Adhesives  
10-17



**WOOD**  
Flooring Adhesives  
18-21



**MARINE**  
Flooring Systems  
24-31




**LEVELLING**  
Compounds  
32-41



**DAMP OR CONTAMINATED**  
Floor Solutions  
44-47



**ANCILLARIES**  
48-53



# TEXTILE Flooring Adhesives

For Securing:  
Carpet / Carpet Tiles / Underlay /  
Release Systems / Gripper / Trims

A comprehensive range of adhesives for the installation of carpet, carpet tiles and underlay. The selection of the most appropriate adhesive will depend on the floorcovering to be installed, backing material and type of bond required.

Award winning Styccobond F3 Flooring Adhesive is long established with over 50 years on the market. It is well recognised as the UK's most used flooring adhesive.

For floorcovering manufacturer's recommendations, please consult the latest F. Ball Recommended Adhesives Guide.



## DIRECT BONDING TO SUBFLOOR TYPE

	Existing Thermoplastic Tiles	Synthetic Anhydrite	Timber Floors	Steel	Epoxy & Polyurethane Floor Finishes	Mastic Asphalt	Non-absorbent Concrete, Terrazzo, Marble, Granolithic etc.	Absorbent Sand/Cement, Screed, Concrete	Stopgap Isolator Membrane	Special Applicator or Dispenser
<b>F3</b>	●	●	●				●	●		
<b>F30</b>										●
<b>F40</b>	●	●	●	●	●		●	●		
<b>F41</b>	●	●	●	●	●		●	●	●	
<b>F45</b>		●	●				●	●		
<b>F52</b>		●	●				●	●		
<b>F60</b>		●	●	●	●		●	●		
<b>F73<sup>PLUS</sup></b>		●	●	●*	●*	●*	●*	●*		
<b>F74</b>		●	●					●		
<b>F81</b>	●	●	●	●	●		●	●		
<b>F84</b>	●	●	●	●	●		●	●	●	

\*Consult our Technical Service department for specific guidance.

## STYCCOBOND F3



## Flooring Adhesive

An aqueous dispersion adhesive which offers excellent wet grab and benefits from an early build up of strength. It is protected against biodegradation and is suitable for use over normal underfloor heating installations.

### GENERAL USE

Carpet adhesive for woven, rubber foam, secondary backed, needlepunch carpets and cork.

### CHARACTERISTICS

- ✓ Approved for marine use
- ✓ Can withstand wet cleaning
- ✓ Suitable for use over underfloor heating
- ✓ High initial grab

### COVERAGE

3m<sup>2</sup> per litre  
2mm x 6mm trowel  
1.5m<sup>2</sup> per litre  
3mm x 6mm trowel

## STYCCOBOND F30



## Carpet Seaming Adhesive

A synthetic rubber/resin adhesive used to prevent fibre loss when seaming the clean cut edges of carpets. Requires the Styccobond F30 Dispenser Bottle.

### GENERAL USE

Seaming rubber foam and secondary backed carpet.

### COVERAGE

50 linear metres per unit (requires F30 dispenser bottle)



## Key:

Marine Approved



Open Time/Pot Life\*  
(minutes)



Drying Time\*  
(minutes)



Shelf Life



Pack Size



Application



\*Dependent on application and site conditions

## STYCCOBOND F40



### High Tack Adhesive

A synthetic polymer emulsion designed to provide a dual bond system. A solvent free, water based adhesive which dries to form a transparent, permanently tacky coating and is suitable for use over underfloor heating installations.

#### GENERAL USE

Dual Bond System (High-Tack release/permanent) for carpets and underlays.

#### CHARACTERISTICS

- ✓ Approved for marine use
- ✓ Solvent free
- ✓ Can withstand wet cleaning
- ✓ Suitable for use over underfloor heating
- ✓ Permanently tacky when dry

#### COVERAGE

5.4m<sup>2</sup> per litre  
1.5mm x 5mm trowel

## STYCCOBOND F41



### Carpet Tile Tackifier

A solvent free emulsion adhesive designed to provide a permanently tacky film to prevent loose lay carpet tiles from moving. It allows the tile to be lifted and replaced easily without remedial work.

#### GENERAL USE

Carpet tiles.

#### CHARACTERISTICS

- ✓ Approved for marine use
- ✓ Solvent free
- ✓ Suitable for use over underfloor heating
- ✓ Permanently tacky when dry

#### COVERAGE

8m<sup>2</sup> – 22m<sup>2</sup> per litre



## STYCCOBOND F45



### Vinyl Flooring Adhesive

A non-staining, co-polymer emulsion, this adhesive has particularly good resistance to PVC plasticisers.

#### GENERAL USE

Highly plasticised PVC backed carpets. Flexible PVC floorcoverings.

#### CHARACTERISTICS

- ✓ Low odour
- ✓ Can withstand wet cleaning
- ✓ Suitable for use over underfloor heating
- ✓ Plasticiser resistant

#### COVERAGE

4m<sup>2</sup> per litre  
1.5mm x 5mm trowel

## STYCCOBOND F52



### Polymer Reinforced Gum Spirit Adhesive

Designed to provide a rigid setting bond. Suitable for underfloor heating installations.

#### GENERAL USE

Fibre-bonded carpet, linoleum and cork.

#### CHARACTERISTICS

- ✓ Can withstand wet cleaning
- ✓ Suitable for use over underfloor heating

#### COVERAGE

3m<sup>2</sup> per litre  
2mm x 6mm trowel or B2

## STYCCOBOND F60



### Contact Adhesive

A solution of synthetic rubber and resin in flammable solvent. The formation of an 'instant bond' makes it particularly suitable for securing floorcoverings and specific wallcoverings vertically on stairs and walls.

#### GENERAL USE

PVC and rubber floorcoverings, covings and nosings.

#### CHARACTERISTICS

- ✓ Can withstand wet cleaning
- ✓ Suitable for use over underfloor heating

#### COVERAGE

2m<sup>2</sup> per litre coating both surfaces

## STYCCOBOND F73 PLUS



### Heavy Duty One Part Flooring Adhesive

A single pack, fibre-reinforced moisture curing heavy duty flooring adhesive suitable for installing a wide range of floorcoverings and for artificial grass. It is water resistant and suitable for outdoor use.

#### GENERAL USE

Can be used for securing needlepunched / fibre bonded carpets, artificial grass, PVC, latex, polyurethane and rubber backed carpets, vinyl and rubber floorings, in both sheet and tile format.

#### CHARACTERISTICS

- ✓ Fibre-reinforced
- ✓ Secure floorcoverings from 90 minutes
- ✓ Weld from 2 hours
- ✓ Resistant to oil, grease and water
- ✓ Suitable for outdoor use

#### COVERAGE

- 25m<sup>2</sup> per pack  
A2 trowel
- 20m<sup>2</sup> per pack  
2mm x 6mm trowel
- 14m<sup>2</sup> per pack  
3mm x 6mm trowel

## STYCCOBOND F74



### Polyurethane Flooring Adhesive

One part moisture curing polyurethane adhesive. When cured it is resistant to water, oil and grease. When fully cured, the water resistance makes it ideal for indoor and outdoor installations subjected to surface water.

#### GENERAL USE

Fibre bonded carpet, vinyl and rubber floorcoverings and synthetic grasses.

#### CHARACTERISTICS

- ✓ Solvent free
- ✓ Can withstand wet cleaning
- ✓ Suitable for use over underfloor heating
- ✓ Resistant to oil, grease and water

#### COVERAGE

- 16.5m<sup>2</sup> per pack  
1.5mm x 5mm trowel
- 10m<sup>2</sup> per pack  
2mm x 6mm trowel
- 8.5m<sup>2</sup> per pack  
3mm x 6mm trowel

## STYCCOBOND F81



### Epoxy Flooring Adhesive

A solvent free, two part epoxy adhesive. When fully cured, the water resistance makes it ideal for indoor and outdoor installations subjected to surface water.

#### GENERAL USE

A wide range of floorcoverings including some vinyl and rubber floorings, PVC backed synthetic grass carpet and fibre bonded carpets.

#### CHARACTERISTICS

- ✓ Solvent free
- ✓ Can withstand wet cleaning
- ✓ Suitable for use over underfloor heating
- ✓ Resistant to oil, grease and water

#### COVERAGE

- 10m<sup>2</sup> per 5kg  
1.5mm x 5mm trowel
- 6m<sup>2</sup> per 5kg  
2mm x 6mm trowel

## STYCCOBOND F84



### Two Part Flooring Adhesive

A two part adhesive specifically designed to secure a range of sheet floorcoverings to the Stopgap Isolator Membrane. Suitable for use in areas that are subject to high levels of moisture. When cured it is resistant to water, oil and grease.

#### GENERAL USE


Stopgap Isolator Membrane Adhesive, also suitable for some sheet vinyl, rubber and linoleum floorcoverings.

#### CHARACTERISTICS

- ✓ Solvent free
- ✓ Can withstand wet cleaning
- ✓ Suitable for use over underfloor heating
- ✓ Resistant to oil, grease and water

#### COVERAGE

- 3m<sup>2</sup> per kg  
1.5mm x 5mm trowel
- 2m<sup>2</sup> per kg  
2mm x 6mm trowel

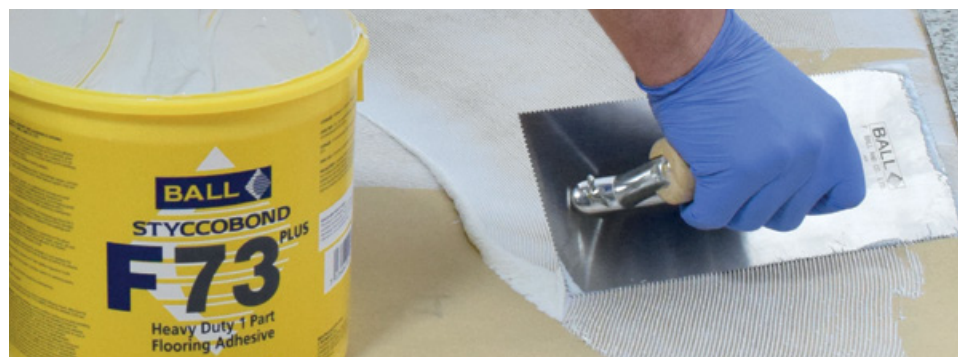

# RESILIENT Flooring Adhesives

For Securing:  
Vinyl / PVC / Linoleum / Rubber /  
Conductive / Anti-Static Flooring /  
Coving / Skirting

A comprehensive range of adhesives for resilient floorcoverings, many of which offer specialist characteristics such as plasticiser resistance, pressure sensitive characteristics or anti-static properties.

For floorcovering manufacturer's recommendations, please consult the latest F. Ball Recommended Adhesives Guide.



## DIRECT BONDING TO SUBFLOOR TYPE

	Existing Thermoplastic Tiles	Synthetic Anhydrite	Timber Floors	Steel	Epoxy & Polyurethane Floor Finishes	Mastic Asphalt	Non-absorbent Concrete, Terrazzo, Marble, Granolithic etc.	Absorbent Sand/Cement, Screed, Concrete	Stopgap Isolator Membrane
F44		●	●				●	●	
F45		●	●					●	
F46		●	●	●	●		●	●	
F48 <sup>PLUS</sup>		●	●					●	
F49		●	●	●	●		●	●	
F52		●	●				●	●	
F54		●	●					●	
F57		●	●					●	
F58 <sup>PLUS</sup>		●	●					●	
F60		●	●	●	●		●	●	
F61		●	●	●	●		●	●	
F66	●	●	●	●	●		●	●	
F73 <sup>PLUS</sup>		●	●	●*	●*	●*	●*	●*	
F74		●	●				●	●	
F81	●	●	●	●	●		●	●	
F84	●	●	●	●	●		●	●	●

\*Consult our Technical Service department for specific guidance.

### Key:

Marine Approved



Open Time\*  
(minutes)



Drying Time\*  
(minutes)



Shelf Life



Pack Size



Application



\*Dependent on application and site conditions

STYCCOBOND

# F44



## Acrylic Adhesive

A solvent free acrylic emulsion adhesive which is designed to give a high bond strength, strong initial tack and a long open time.

### GENERAL USE

Acrylic Adhesive for vinyl sheet and tiles, PVC backed carpets.

### CHARACTERISTICS

- ✓ Approved for marine use
- ✓ Solvent free
- ✓ Can withstand wet cleaning
- ✓ Suitable for use over underfloor heating
- ✓ Long open time
- ✓ High initial grab

### COVERAGE

4m<sup>2</sup> per litre  
1.5mm x 5mm trowel

STYCCOBOND

# F45



## Vinyl Floor Adhesive

A non-staining, co-polymer emulsion, this adhesive has particularly good resistance to PVC plasticisers.

### GENERAL USE

Highly plasticised PVC backed carpets. Flexible PVC floorcoverings.

### CHARACTERISTICS

- ✓ Low odour
- ✓ Can withstand wet cleaning
- ✓ Suitable for use over underfloor heating
- ✓ Plasticiser resistant
- ✓ Solvent Free

### COVERAGE

4m<sup>2</sup> per litre  
1.5mm x 5mm trowel

STYCCOBOND

# F46



## Pressure Sensitive Acrylic Flooring Adhesive

Solvent free adhesive that dries to a permanent tacky film.

### GENERAL USE

Pressure Sensitive Adhesive for vinyl floorcoverings.

### CHARACTERISTICS

- ✓ Approved for marine use
- ✓ Solvent free
- ✓ Suitable for use over underfloor heating
- ✓ Long open time
- ✓ Permanently tacky when dry

### COVERAGE

5m<sup>2</sup> per litre  
1.5mm x 5mm trowel  
4m<sup>2</sup> per litre  
Fine Notch/A1 trowel  
3m<sup>2</sup> per litre  
A2 trowel

STYCCOBOND

# F48

PLUS



## Fibre-Reinforced, High Temperature Grade Vinyl Adhesive

A fibre-reinforced solvent free co-polymer emulsion adhesive having high resistance to both heat and PVC plasticisers, making it particularly suitable for use in conservatories or areas with floor to ceiling windows.

### GENERAL USE

Plasticised PVC floorcoverings in both sheet and tile form.

### CHARACTERISTICS

- ✓ Solvent free
- ✓ Can withstand wet cleaning
- ✓ Suitable for use over underfloor heating
- ✓ Plasticiser resistant

### COVERAGE

4m<sup>2</sup> per litre  
1.5mm x 5mm trowel

STYCCOBOND

# F49

HYBRID PS



## Pressure Sensitive Adhesive

A two-part temperature tolerant, water-based pressure sensitive adhesive for bonding vinyl floorcoverings where temperatures can fluctuate between -20°C and +60°C.

### GENERAL USE

Designed for use in areas where floorcoverings have to be tolerant of extreme temperature variations.

### CHARACTERISTICS

- ✓ Water resistant – suitable for wet rooms
- ✓ 7 hours working time\*
- ✓ Fast build up of bond strength
- ✓ Very high tack
- ✓ Solvent Free

\*3 hours pot life plus 4 hours open time

### COVERAGE

5.5m<sup>2</sup> – 6m<sup>2</sup> per kg  
Fine Notch Trowel (A1)

## For the installation of Skirting, Coving and Capping

### GENERAL USE


Can be used as a single coat pressure sensitive impact adhesive for securing PVC edging and flexible PVC skirting, coving and capping as well as PVC and PVC backed textile floor and wall coverings.

### CHARACTERISTICS

- ✓ Water resistant – suitable for wet rooms
- ✓ High strength, high grab, rapid curing
- ✓ Single surface bonding

### COVERAGE

120 linear metres per 2kg  
With a STYCCOBOND Spreader



Spreader supplied with kit



STYCCOBOND

# F52



## Polymer Reinforced Gum Spirit Adhesive

Designed to provide a rigid setting bond.

### GENERAL USE

Fibre-bonded carpet, linoleum and cork.

### CHARACTERISTICS

- ✓ Can withstand wet cleaning
- ✓ Suitable for use over underfloor heating

### COVERAGE

3m<sup>2</sup> per litre  
2mm x 6mm trowel

## STYCCOBOND F54



### High Grab Linoleum Adhesive

A non-flammable, synthetic rubber emulsion which is a safer alternative to traditional gum spirits. It has a greater level of initial grab and moisture resistance than lignin paste.

#### GENERAL USE

Securing a wide range of linoleum sheet and tile floorcoverings.

#### CHARACTERISTICS

- ✓ Low odour
- ✓ Can withstand wet cleaning
- ✓ Suitable for use over underfloor heating
- ✓ High initial grab

#### COVERAGE

3m<sup>2</sup> per litre  
2mm x 6mm trowel

## STYCCOBOND F57



### Conductive Acrylic Flooring Adhesive

Solvent free, carbon fibre filled acrylic conductive adhesive designed to give a high bond strength, with a strong initial tack and long open time.

#### GENERAL USE

Conductive and antistatic PVC floorcoverings.

#### CHARACTERISTICS

- ✓ Solvent free
- ✓ Can withstand wet cleaning
- ✓ Suitable for use over underfloor heating
- ✓ Plasticiser resistant

#### COVERAGE

4m<sup>2</sup> per litre  
2mm x 6mm trowel

## STYCCOBOND F58 PLUS



### Fibre-Reinforced Vinyl and Rubber Floorcovering Adhesive

Fast-drying, fibre-reinforced, solvent free wet lay, semi wet or pressure sensitive adhesive.

#### GENERAL USE

PVC vinyl sheet and tile floorcoverings. Rubber sheet and tile floorcoverings.

#### CHARACTERISTICS

- ✓ Approved for marine use
- ✓ Low odour
- ✓ Can withstand wet cleaning
- ✓ Suitable for use over underfloor heating
- ✓ High initial grab

#### COVERAGE

Up to 6m<sup>2</sup> per litre

## STYCCOBOND F60



### Contact Adhesive

A solution of synthetic rubber and resin in flammable solvent. The formation of an 'instant bond' makes it particularly suitable for securing floorcoverings and specific wallcoverings vertically on stairs and walls.

#### GENERAL USE

PVC and rubber floorcoverings, covings and nosings.

#### CHARACTERISTICS

- ✓ Can withstand wet cleaning
- ✓ Suitable for use over underfloor heating

#### COVERAGE

2m<sup>2</sup> per litre coating both surfaces





STYCCOBOND

**F61**

## Heavy Duty Contact Adhesive

A solution of synthetic rubber and resin in flammable solvent. The combination of a quick drying time and a long open time, makes it useful for use on stairs and steps.

### GENERAL USE

Securing PVC and rubber edgings, covings and nosings, floor and wallcoverings with backings of PVC, rubber, cork and most textiles.

### CHARACTERISTICS

- ✓ Can withstand wet cleaning
- ✓ Suitable for use over underfloor heating

### COVERAGE

2m<sup>2</sup> per litre coating both surfaces

STYCCOBOND

**F66**

## Solvent Free Contact Adhesive

A solvent free, low odour adhesive ideal for fixing to vertical as well as horizontal surfaces. It has a long open time and can be reactivated by heat.

### GENERAL USE

Securing PVC and rubber edgings, covings and nosings, floor and wallcoverings with backings of PVC, rubber, cork and most textiles.

### CHARACTERISTICS

- ✓ Approved for marine use
- ✓ Solvent free
- ✓ Can withstand wet cleaning
- ✓ Suitable for use over underfloor heating

### COVERAGE

5m<sup>2</sup> – 9m<sup>2</sup> per coat per litre coating both surfaces

STYCCOBOND

**F73 PLUS**

## Heavy Duty One Part Flooring Adhesive

A single pack, fibre-reinforced moisture curing heavy duty flooring adhesive suitable for installing a wide range of floorcoverings and for artificial grass. It is water resistant and suitable for outdoor use.

### GENERAL USE

Can be used for securing needlepunched / fibre bonded carpets, artificial grass, PVC, latex, polyurethane and rubber backed carpets, vinyl and rubber floorings, in both sheet and tile format.

### CHARACTERISTICS

- ✓ Fibre-reinforced
- ✓ Secure floorcoverings from 90 minutes
- ✓ Weld from 2 hours
- ✓ Resistant to oil, grease and water
- ✓ Suitable for outdoor use

### COVERAGE

25m<sup>2</sup> per pack  
A2 trowel

20m<sup>2</sup> per pack  
2mm x 6mm trowel

14m<sup>2</sup> per pack  
3mm x 6mm trowel

STYCCOBOND

**F74**

## Polyurethane Flooring Adhesive

One part moisture curing polyurethane adhesive. When cured it is resistant to water, oil and grease. When fully cured, the water resistance makes it ideal for indoor and outdoor installations subjected to surface water.

### GENERAL USE

Fibre bonded carpet, vinyl and rubber floorcoverings and synthetic grasses.

### CHARACTERISTICS

- ✓ Solvent free
- ✓ Can withstand wet cleaning
- ✓ Suitable for use over underfloor heating
- ✓ Resistant to oil, grease and water

### COVERAGE

16.5m<sup>2</sup> per pack  
1.5mm x 5mm trowel

10m<sup>2</sup> per pack  
2mm x 6mm trowel

8.5m<sup>2</sup> per pack  
3mm x 6mm trowel

STYCCOBOND

**F81**

## Epoxy Flooring Adhesive

A solvent free, two part epoxy adhesive. When fully cured, the water resistance makes it ideal for indoor and outdoor installations subjected to surface water.

### GENERAL USE

A wide range of floorcoverings including some vinyl and rubber floorings, PVC backed synthetic grass carpet and fibre bonded carpets.

### CHARACTERISTICS

- ✓ Solvent free
- ✓ Can withstand wet cleaning
- ✓ Suitable for use over underfloor heating
- ✓ Resistant to oil, grease and water

### COVERAGE

10m<sup>2</sup> per 5kg  
1.5mm x 5mm trowel

6m<sup>2</sup> per 5kg  
2mm x 6mm trowel

STYCCOBOND

**F84**

## Two Part Flooring Adhesive

A two part adhesive specifically designed to secure a range of sheet floorcoverings to the Stopgap Isolator Membrane. Suitable for use in areas that are subject to high levels of moisture. When cured it is resistant to water, oil and grease.

### GENERAL USE

Stopgap Isolator Membrane Adhesive, also suitable for some sheet vinyl, rubber and linoleum floorcoverings.

### CHARACTERISTICS

- ✓ Solvent free
- ✓ Can withstand wet cleaning
- ✓ Suitable for use over underfloor heating
- ✓ Resistant to oil, grease and water

### COVERAGE

3m<sup>2</sup> per kg  
1.5mm x 5mm trowel

2m<sup>2</sup> per kg  
2mm x 6mm trowel

# WOOD Flooring Adhesives

For Securing:  
Solid / Engineered / Laminate

A range of adhesives and ancillaries that have been formulated to meet the needs of professional wood floor installers. Covering the needs of day-to-day wood floor installation, the range offers a choice of adhesives to meet application, site and performance requirements. Ancillaries ensure that work can start as quickly as possible and can be brought to a perfect finish.



## Key:

Open Time\*  
(minutes)



Drying Time\*  
(minutes)



Shelf Life



Pack Size



Application



\*Dependent on application and site conditions

## DIRECT BONDING TO SUBFLOOR TYPE

	Existing Thermoplastic Tiles	Synthetic Anhydrite	Timber Floors	Steel	Epoxy & Polyurethane Floor Finishes	Mastic Asphalt	Non-absorbent Concrete, Terrazzo, Marble, Granolithic etc.	Absorbent Sand/Cement, Screed, Concrete
<b>F21</b>		●	●					●
<b>B95</b>		●	●		●		●	●
<b>FLEX</b>		●	●	●			●	●

## STYCCOBOND F21



### Wood Block Flooring Adhesive

A traditional high temperature bitumen/rubber dipping grade emulsion. Non-flammable, it is also protected against biodegradation.

#### GENERAL USE

Wood block (minimum 12mm thick).

#### CHARACTERISTICS

✓ Suitable for use over underfloor heating

#### COVERAGE

1 m<sup>2</sup> per kg  
Designed for application by dipping

## STYCCOBOND B90



### Woodworking Adhesive

PVA emulsion adhesive protected against biodegradation. Dries to a colourless transparent film.

#### GENERAL USE

Used on the tongue and groove of loose lay systems.

#### CHARACTERISTICS

✓ Water resistant to D3 of BS EN204

#### COVERAGE

200 linear metres  
@ 3mm bead per litre





## STYCCOBOND B95



## High Performance, Flexible Wood Flooring Adhesive

A flexible adhesive specially designed to accommodate natural movement in wood flooring over its lifetime.

### GENERAL USE

Securing engineered boards (semi-solids) and a wide range of plank and wood strip flooring up to a maximum length of 1.5 metres.

### CHARACTERISTICS

- ✓ Suitable for use over underfloor heating

### COVERAGE

800g per m<sup>2</sup>  
B3 or 3mm x 6mm trowel  
1000g per m<sup>2</sup>  
B11 trowel

## STYCCO FLEX



## Rapid Curing Flexible Adhesive

A rapid curing flexible adhesive with excellent gap filling properties that is suitable for bonding a wide range of construction and building materials to most surfaces in both internal and external environments.

### GENERAL USE

Suitable for fixing carpet gripper, PVC cladding, skirting boards, architrave, trims and securing header rows when installing wood flooring. Stycco Flex can be used to install highly plasticised PVC flooring accessories and trims, including skirting, coving, capping and edging strips.

### CHARACTERISTICS

- ✓ Secure nosings from 1 hour
- ✓ Secure carpet gripper from 30 minutes
- ✓ Suitable for interior and exterior application

### COVERAGE

38 linear metres  
@ 3mm bead



		Coverage		Application Method				Product Characteristics													Direct Bonding to Subfloor Type										Adhesive	
				Approved for Marine Use	Trowel	Roller	Brush	Special applicator or dispenser	Solvent free	Low odour	Can withstand wet cleaning	Suitable for use over underfloor heating and water	Resistant to oil, grease	Fast-Curing / Drying	Pesticide resistant	Long open time	High initial grab	Permanently tacky when dry	Existing Thermoplastic Tiles	Synthetic Anhydrite	Timber Floors	Steel	Epoxy & Polyurethane Floor Finishes	Mastic Asphalt	Non-absorbent Concrete, Terrazo, Marble, Granolithic etc	Absorbent sand/Cement, Screed Concrete	Stopgap Isolator Membrane					
TEXTILE FLOORING ADHESIVES	F3	3m <sup>2</sup> per litre	*	•				•	•							•	•	•	•	•	•	•	•	•	•	•	•	•	Flooring Adhesive for Woven, Rubber Foam, Felt, Secondary Backed, Needle-punch Carpets and Cork.	F3		
	F30	100 linear metres per litre					•																					For seaming secondary, high density rubber foam and polyurethane backed carpets.	F30			
	F40	5.4m <sup>2</sup> per litre	*	•				•	•	•	•					•	•	•	•	•	•	•	•	•	•	•	•	Dual Bond, High-Tack Adhesive for Carpets and Underlays.	F40			
	F41	8 – 22m <sup>2</sup> per litre	*		•	•			•	•	•					•	•	•	•	•	•	•	•	•	•	•	•	Tackifier for Carpet Tiles.	F41			
	F45	3m <sup>2</sup> per litre		•						•	•																	Acrylic Adhesive for Highly Plasticised PVC backed Carpets, Flexible PVC Floorcoverings.	F45			
	F52	3m <sup>2</sup> per litre		•						•	•																	Gum Spirit Adhesive for Fibre-Bonded Carpet, Linoleum and Cork.	F52			
	F60	2m <sup>2</sup> per litre coating both surfaces		•			•			•	•											•	•	•	•	•	•	Contact Adhesive for Floorcoverings, PVC and Rubber Covings.	F60			
	F73 PLUS	Up to 2.4m <sup>2</sup> /kg		•				•	•	•	•		•			*							*	*	*	*	*	One Part Heavy Duty Flooring Adhesive	F73 PLUS			
	F74	1.5m <sup>2</sup> per kg		•				•	•	•	•																	Polyurethane Single Part Adhesive – Moisture Resistant.	F74			
	F81	1.5m <sup>2</sup> per kg	*	•				•	•	•	•							•	•	•	•	•	•	•	•	•	•	Two-Part Epoxy Adhesive – Moisture Resistant.	F81			
F84	3m <sup>2</sup> per kg		•				•	•	•	•					•						•	•	•	•	•	•	Two-Part Adhesive.	F84				
RESILIENT FLOORING ADHESIVES	F44	4m <sup>2</sup> per litre	*	•			•	•	•	•					•	•	•	•	•	•	•	•	•	•	•	•	•	Acrylic Adhesive for Vinyl Sheet and Tiles, PVC backed Carpets and Rubber Floorcoverings.	F44			
	F45	3m <sup>2</sup> per litre		•				•	•	•																	Acrylic Adhesive for Highly Plasticised PVC backed Carpets, Flexible PVC Floorcoverings.	F45				
	F46	3 – 5m <sup>2</sup> per litre	*	•				•	•	•							•										Pressure Sensitive Adhesive for Vinyl Floorcoverings.	F46				
	F48 PLUS	4m <sup>2</sup> per litre		•				•	•	•																	High Temperature Vinyl Adhesive.	F48 PLUS				
	F49	5.5 – 6m <sup>2</sup> per kg	*	•				•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	Temperature Tolerant PS Adhesive for Vinyls and PVC Accessories and Trims.	F49				
	F52	3m <sup>2</sup> per litre		•					•	•	•												•	•	•	•	Gum Spirit Adhesive for Fibre-Bonded Carpet, Linoleum and Cork.	F52				
	F54	3m <sup>2</sup> per litre		•					•	•	•																High Grab Linoleum Adhesive.	F54				
	F57	4m <sup>2</sup> per litre		•					•	•	•					•	•	•	•	•	•	•	•	•	•	•	•	Conductive Acrylic Adhesive for Conductive and Antistatic PVC Floorcoverings.	F57			
	F58 PLUS	4 – 6m <sup>2</sup> per litre	*	•					•	•	•						•										Fibre-reinforced Vinyl and Rubber Floorcovering Adhesive.	F58 PLUS				
	F60	2m <sup>2</sup> per litre coating both surfaces		•		•			•	•	•																Contact Adhesive for Floorcoverings, PVC and Rubber Covings.	F60				
	F61	2m <sup>2</sup> per litre coating both surfaces		•		•			•	•	•					*											Heavy-Duty Contact Adhesive for Floorcoverings, PVC and Rubber Covings.	F61				
	F66	5m <sup>2</sup> per coat per litre	*	•	•	•			•	•	•						•										Solvent Free, Water Based Contact Adhesive.	F66				
	F73 PLUS	Up to 2.4m <sup>2</sup> /kg		•				•	•	•	•		•			*							*	*	*	*	One Part Heavy Duty Flooring Adhesive	F73 PLUS				
	F74	1.5m <sup>2</sup> per kg		•					•	•	•					*											Polyurethane Single Part Adhesive – Moisture Resistant.	F74				
	F81	1.5m <sup>2</sup> per kg	*	•					•	•	•					*			•	•	•	•	•	•	•	•	Two-Part Epoxy Adhesive – Moisture Resistant.	F81				
F84	3m <sup>2</sup> per kg		•					•	•	•					*	•										Two-Part Adhesive.	F84					
WOOD FLOORING ADHESIVES	B95	800g/m <sup>2</sup> – 1000g/m <sup>2</sup>		•				•	•												•						High Performance, Flexible Wood Flooring Adhesive.	B95				
	F21	1m <sup>2</sup> per kg					•			•																	Wood Block Flooring Adhesive.	F21				
	FLEX	38m per cartridge 3mm bead						•	•	•	•					•	•	•	•	•			*	•	•	•	Rapid Curing Flexible Adhesive for fixing stair nosings, PVC and a wide range of construction and building materials.	FLEX				
MARINE FLOORING SYSTEMS	F3	3m <sup>2</sup> per litre	*	•					•	•																		Flooring Adhesive for Woven, Rubber Foam, Felt, Secondary Backed, Needle-punch Carpets and Cork.	F3			
	F40	5.4m <sup>2</sup> per litre	*	•					•	•																	Dual Bond, High-Tack Adhesive for Carpets and Underlays.	F40				
	F41	8 – 22m <sup>2</sup> per litre	*		•	•				•	•																Tackifier for Carpet Tiles.	F41				
	F44	4m <sup>2</sup> per litre	*	•					•	•																	Acrylic Adhesive for Vinyl Sheet and Tiles, PVC backed Carpets and Rubber Floorcoverings.	F44				
	F46	3 – 5m <sup>2</sup> per litre	*	•					•	•																	Pressure Sensitive Adhesive for Vinyl Floorcoverings.	F46				
	F49	5.5 – 6m <sup>2</sup> per kg	*	•					•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	Temperature Tolerant PS Adhesive for Vinyls and PVC Accessories and Trims.	F49				
	F58	4m <sup>2</sup> per litre	*	•					•	•																	Acrylic Rubber Floorcovering Adhesive.	F58				
	F66	5m <sup>2</sup> per coat per litre	*	•	•	•			•	•	•																Solvent Free, Water Based Contact Adhesive.	F66				
F81	1.5m <sup>2</sup> per litre	*	•					•	•	•																Two-Part Epoxy Adhesive – Moisture Resistant.	F81					
DAMP/CONTAMINATED FLOOR SOLUTIONS	F47*	3 – 5m <sup>2</sup> per litre		•				•	•	•													•	•	•	•	Pressure Sensitive Vinyl Adhesive (*For use ONLY with Stopgap Isolator Membrane).	F47*				
	F84*	3m <sup>2</sup> per kg		•				•	•	•																	Two-Part Adhesive. (*For use ONLY with Stopgap Isolator Membrane).	F84*				
ANCILLARIES	F1	n/a						•	•																		For seaming woven backed carpets.	F1				
	FLEX	38m per cartridge 3mm bead						•	•	•													*	•	•	•	Rapid Curing Flexible Adhesive for fixing stair nosings, PVC and a wide range of construction and building materials.	FLEX				
	SEAL	11m per cartridge 6mm bead						•	•	•																	One Component Silicone Sealant for sealing floorcoverings to sanitary ware, ceramic tiles, matwells, pipes etc.	SEAL				

\*Consult our Technical Service department for specific guidance.

# MARINE Flooring Systems

## Key:

Marine Approved



Walk On Time



Open Time\*  
(minutes)



Mix With Water



Drying Time\*  
(minutes)



European Conformity



Pack Size



UK Conformity Assessed



Shelf Life



Application




TROWEL ROLLER BRUSH

A range of MED-certified flooring adhesives and compounds approved for marine and offshore use. Tested in accordance with IMO standards and carrying the appropriate certification for use in marine floor applications, they have been used on various prestigious vessels such as the 'Adventure of the Seas' and the 'Queen Mary' luxury liners. They also have a wider range of uses on offshore platforms, RO-RO ferries, super yachts, barges and many other types of sea-going vessels.



## STYCCOBOND

# F3



## Flooring Adhesive

An aqueous dispersion adhesive which offers excellent wet grab and benefits from an early build up of strength. It is protected against biodegradation and is suitable for use over normal underfloor heating installations.

### GENERAL USE

Carpet adhesive for woven, rubber foam, secondary backed, needlepunch carpets and cork.

### CHARACTERISTICS


- ✓ Approved for marine use
- ✓ Can withstand wet cleaning
- ✓ Suitable for use over underfloor heating
- ✓ High initial grab

### COVERAGE

3m<sup>2</sup> per litre  
2mm x 6mm trowel  
1.5m<sup>2</sup> per litre  
3mm x 6mm trowel

## STYCCOBOND

# F40



## High Tack Adhesive

A synthetic polymer emulsion designed to provide a dual bond system. A solvent free, water based adhesive which dries to form a transparent, permanently tacky coating and is suitable for use over underfloor heating installations.

### GENERAL USE

Dual Bond System (High-Tack release/permanent) for carpets and underlays.

### CHARACTERISTICS


- ✓ Approved for marine use
- ✓ Solvent free
- ✓ Can withstand wet cleaning
- ✓ Suitable for use over underfloor heating
- ✓ Permanently tacky when dry

### COVERAGE

5.4m<sup>2</sup> per litre  
1.5mm x 5mm trowel

## STYCCOBOND

# F41



## Carpet Tile Tackifier

A solvent free emulsion adhesive designed to provide a permanently tacky film to prevent loose lay carpet tiles from moving. It allows the tile to be lifted and replaced easily without remedial work.

### GENERAL USE

Carpet tiles.

### CHARACTERISTICS

- ✓ Approved for marine use
- ✓ Solvent free
- ✓ Suitable for use over underfloor heating
- ✓ Permanently tacky when dry

### COVERAGE


8m<sup>2</sup> – 22m<sup>2</sup> per litre

\*Dependent on application and site conditions

## STYCCOBOND F44

### Acrylic Adhesive

A solvent free acrylic emulsion adhesive which is designed to give a high bond strength, strong initial tack and a long open time.



#### GENERAL USE

Acrylic Adhesive for vinyl sheet and tiles, PVC backed carpets.

#### CHARACTERISTICS

- ✓ Approved for marine use
- ✓ Solvent free
- ✓ Can withstand wet cleaning
- ✓ Suitable for use over underfloor heating
- ✓ Long open time
- ✓ High initial grab

#### COVERAGE

4m<sup>2</sup> per litre  
1.5mm x 5mm trowel

## STYCCOBOND F46

### Pressure Sensitive Acrylic Flooring Adhesive

Solvent free adhesive that dries to a permanent tacky film.



#### GENERAL USE

Pressure Sensitive Adhesive for vinyl floorcoverings.

#### CHARACTERISTICS

- ✓ Approved for marine use
- ✓ Solvent free
- ✓ Suitable for use over underfloor heating
- ✓ Long open time
- ✓ Permanently tacky when dry

#### COVERAGE

5m<sup>2</sup> per litre  
1.5mm x 5mm trowel  
4m<sup>2</sup> per litre  
Fine Notch/A1 trowel  
3m<sup>2</sup> per litre  
A2 trowel

## STYCCOBOND F49 HYBRID PS

### Pressure Sensitive Adhesive

A two-part temperature tolerant, water-based pressure sensitive adhesive for bonding vinyl floorcoverings where temperatures can fluctuate between -20°C and +60°C.



#### GENERAL USE

Designed for use in areas where floorcoverings have to be tolerant of extreme temperature variations.

#### CHARACTERISTICS

- ✓ Water resistant – suitable for wet rooms
- ✓ 7 hours working time\*
- ✓ Fast build up of bond strength
- ✓ Very high tack
- ✓ Solvent Free

\*3 hours pot life plus 4 hours open time


#### COVERAGE

5.5m<sup>2</sup> – 6m<sup>2</sup> per kg  
Fine Notch Trowel (A1)

### For the installation of Skirting, Coving and Capping

#### GENERAL USE

Can be used as a single coat pressure sensitive impact adhesive for securing PVC edging and flexible PVC skirting, coving and capping as well as PVC and PVC backed textile floor and wall coverings.



Spreader supplied with kit

#### CHARACTERISTICS

- ✓ Water resistant – suitable for wet rooms
- ✓ High strength, high grab, rapid curing
- ✓ Single surface bonding

#### COVERAGE

120 linear metres per 2kg  
With a STYCCOBOND Spreader






STYCCOBOND

# F58

PLUS

NEW



## Fibre-Reinforced Vinyl and Rubber Floorcovering Adhesive

Fast-drying, fibre-reinforced, solvent free wet lay, semi wet or pressure sensitive adhesive.

### GENERAL USE

PVC vinyl sheet and tile floorcoverings. Rubber sheet and tile floorcoverings.

### CHARACTERISTICS

- ✓ Approved for marine use
- ✓ Low odour
- ✓ Can withstand wet cleaning
- ✓ Suitable for use over underfloor heating
- ✓ High initial grab

### COVERAGE

Up to 6m<sup>2</sup> per litre

STYCCOBOND

# F66



## Solvent Free Contact Adhesive

A solvent free, low odour adhesive ideal for fixing to vertical as well as horizontal surfaces. It has a long open time and can be reactivated by heat.

### GENERAL USE

Securing PVC and rubber edgings, covings and nosings, floor and wallcoverings with backings of PVC, rubber, cork and most textiles.

### CHARACTERISTICS

- ✓ Approved for marine use
- ✓ Solvent free
- ✓ Can withstand wet cleaning
- ✓ Suitable for use over underfloor heating

### COVERAGE

5m<sup>2</sup> – 9m<sup>2</sup> per coat per litre coating both surfaces

STYCCOBOND

# F81



## Epoxy Flooring Adhesive

A solvent free, two part epoxy adhesive. When fully cured, the water resistance makes it ideal for indoor and outdoor installations subjected to surface water.

### GENERAL USE

A wide range of floorcoverings including some vinyl and rubber floorings, PVC backed synthetic grass carpet and fibre bonded carpets.

### CHARACTERISTICS

- ✓ Solvent free
- ✓ Can withstand wet cleaning
- ✓ Suitable for use over underfloor heating
- ✓ Resistant to oil, grease and water

### COVERAGE

10m<sup>2</sup> per 5kg  
1.5mm x 5mm trowel  
6m<sup>2</sup> per 5kg  
2mm x 6mm trowel

# STOPGAP 300 HD



## Heavy-Duty Levelling Compound

A rapid hardening, water mix levelling compound.

### GENERAL USE

It is designed for use on both absorbent and non-absorbent interior subfloors, in areas that are subjected to heavy-duty trafficking.

### CHARACTERISTICS

- ✓ Application thickness from 2 – 20mm\*
- ✓ Suitable for hand or pump application
- ✓ Excellent self-levelling properties
- ✓ Protein free

\*Up to a maximum of 15mm unfilled

### COVERAGE

5m<sup>2</sup> at 3mm thickness

# STOPGAP 600 BASE



## Deep Section Compound

A water mix, base compound designed for use where floor levels need to be raised quickly and economically.

### GENERAL USE

Designed for application up to a maximum of 50mm and a minimum of 5mm, to provide a sound base.

### CHARACTERISTICS

- ✓ Thickness from 5 – 50mm in one application
- ✓ Suitable for hand or pump application
- ✓ Low odour
- ✓ Protein free

### COVERAGE

2.8m<sup>2</sup> at 5mm thickness

# STOPGAP 700 SUPERFLEX



## Fibre-Reinforced Levelling Compound

Based on the latest advances in cement and polymer technology, enabling fast track application prior to the installation of new floorcoverings.

### GENERAL USE

Fast drying, flexible, fibre-reinforced self-levelling compound, designed specifically for use over plywood.

### CHARACTERISTICS

- ✓ Approved for marine use
- ✓ Application thickness from 2 – 10mm
- ✓ Fibre reinforced for improved flexibility

### COVERAGE

4.8m<sup>2</sup> at 3mm thickness

# STOPGAP 1200 PRO



## High Performance Smoothing Compound

A low odour, fast setting, fast drying, two component smoothing compound suitable for preparing sound internal subfloors prior to the installation of new floorcoverings.

### GENERAL USE

It is particularly suitable for use over old adhesive residues (including bitumen and carpet tile tackifiers) without the need for priming.

### CHARACTERISTICS

- ✓ Application thickness from 2 – 10mm
- ✓ Can be filled up to 30mm
- ✓ Suitable direct to adhesive residues
- ✓ Lay floorcoverings from 4 hours

### COVERAGE

5m<sup>2</sup> at 2 – 3mm thickness



# STOPGAP 1200



## Liquid

### GENERAL USE

For use with Stopgap 1200 powder only.

### MIXING RATIO

5 litres to 20kg of powder





# LEVELLING Compounds

## Key:

Marine Approved



European Conformity



Walk On Time



UK Conformity Assessed



Mix With Water



Application



Shelf Life



Pack Size



Stopgap 1200 PRO is the latest addition to F. Ball's range of high performance levelling compounds. Designed for use directly over old adhesive residues, this self-smoothing product provides the ultimate, cost-effective solution to dealing with adhesive residues, which would otherwise require lengthy and costly mechanical removal. Utilising the latest cement technology, Stopgap 1200 offers superior flow characteristics and is ready to receive new floorcoverings from only four hours. The levelling compound is suitable for use over a wide range of subfloor types and as it is protein and ammonia free it is ideally suited for use in clinical and biologically sensitive areas.

## STOPGAP GREEN BAG

### Fast Set Smoothing Compound

A fast setting, low odour, protein free floor smoothing compound. The cured product has a high strength making it suitable in areas subject to both light and heavy-duty traffic.

#### GENERAL USE

Absorbent and non-absorbent subfloors.

#### CHARACTERISTICS

- ✓ Application thickness from 3 – 20mm
- ✓ Fast set formula
- ✓ Low odour
- ✓ Use in clinical areas

#### COVERAGE

5m<sup>2</sup> at 3mm  
1m<sup>2</sup> at 20mm  
(Filled mix)



## STOPGAP 114

### Liquid

#### GENERAL USE

Absorbent and non-absorbent surfaces. For use with Stopgap Green Bag Powder.

#### MIXING RATIO

5 litres to 25kg of powder



## STOPGAP 128

### Liquid

#### GENERAL USE

Absorbent and non-absorbent surfaces. For use with Stopgap Green Bag Powder.

#### MIXING RATIO

5 litres to 25kg of powder



STOPGAP  
FAST-TRACK  
**30**



## Rapid Set, Rapid Dry Levelling Compound

Incorporates the latest advances in cement technology providing a truly fast track solution.

### GENERAL USE

Light to heavy-duty applications for preparing sound absorbent and non-absorbent subfloors prior to the installation of new floorcoverings.

### CHARACTERISTICS

- ✓ Application thickness from 2 – 10mm
- ✓ Install floorcoverings from as little as 45 minutes
- ✓ Excellent self-levelling properties
- ✓ Advanced binder technology

### COVERAGE

5.6m<sup>2</sup> at 2mm thickness



STOPGAP  
**RED BAG**



## Self-Levelling Compound

A protein free blend of sand, cement and organic polymers, when mixed it is designed to produce a smooth dense surface.

### GENERAL USE

Areas subject to foot and light wheeled traffic and can be used over normal underfloor heating installations.

### CHARACTERISTICS

- ✓ Application thickness from 3 – 6mm
- ✓ Can be filled up to 10mm
- ✓ Self-levelling properties
- ✓ Protein free

### COVERAGE

4.8m<sup>2</sup> at 3mm thickness

STOPGAP  
**200**  
SMOOTH



## Acrylic Floor Smoothing Compound

A fast setting acrylic floor smoothing compound, designed for use on both absorbent and non-absorbent subfloors.

### GENERAL USE

The Stopgap 200 acrylic liquid is protein free making it suitable for application in biologically sensitive areas. Application can be to a maximum of 15mm unfilled.

### CHARACTERISTICS

- ✓ Application thickness from 2 – 20mm
- ✓ Extended open time
- ✓ Low odour
- ✓ Use in clinical areas

### COVERAGE

4.8m<sup>2</sup> at 3mm thickness

STOPGAP  
**200**



## Acrylic Liquid

### GENERAL USE

For use with Stopgap 200 Powder.

### MIXING RATIO

5 litres to 25kg of powder

# STOPGAP 300 HD



## Heavy-Duty Levelling Compound

A rapid hardening, water mix levelling compound.

### GENERAL USE

It is designed for use on both absorbent and non-absorbent interior subfloors, in areas that are subjected to heavy-duty trafficking.

### CHARACTERISTICS

- ✓ Application thickness from 2 – 20mm\*
- ✓ Suitable for hand or pump application
- ✓ Excellent self-levelling properties
- ✓ Protein free

\*Up to a maximum of 15mm unfilled

### COVERAGE

5m<sup>2</sup> at 3mm thickness

# STOPGAP 400 REPAIR



## Rapid Hardening Repair Compound

A protein free, water mix compound designed for repairing and making good internal floors, steps and stairs.

### GENERAL USE

It is slump resistant and rapid hardening making it ideal for creating ramps and coving. It can be trowelled to a feathered-edge and used in conjunction with Stopgap Graded Aggregate for greater thickness.

### CHARACTERISTICS

- ✓ Application thickness from 2 – 20mm unfilled mix
- ✓ Application thickness from 20 – 50mm filled mix
- ✓ Ramps and covings can be repaired
- ✓ Can be trowelled to a feathered edge

### COVERAGE

2.1m<sup>2</sup> at 3mm thickness per 10kg unit



# STOPGAP 460 EXTERIOR REPAIR



## Rapid Repair Mortar

Specifically designed for use in damp conditions and has excellent freeze / thaw resistance when used in external environments.

### GENERAL USE

Polymer modified, fast setting mortar for repairing external floors prior to the application of Stopgap 850 or for use in internal applications under Stopgap waterproof surface membranes.

### CHARACTERISTICS


- ✓ Application thickness from 3 – 50mm filled mix
- ✓ Ramps and covings can be formed
- ✓ Can be used in vertical applications

### COVERAGE

2.3m<sup>2</sup> at 3mm thickness



STOPGAP  
**500**  
MICRO



**Floor Finishing Compound**

A fast drying floor finishing compound. Stopgap 500 will provide a uniform surface, free from imperfections.

**GENERAL USE**

Suitable for light to medium traffic areas. Water mix, it requires no priming and can be trowel applied to form a feathered edge finish.

**CHARACTERISTICS**

- ✓ Suitable over plywood joints
- ✓ Protein free
- ✓ Low odour

**COVERAGE**

36m<sup>2</sup> Micro-Coat per 8kg unit

STOPGAP  
**600**  
BASE



**Deep Section Compound**

A water mix, base compound designed for use where floor levels need to be raised quickly and economically.

**GENERAL USE**

Designed for application up to a maximum of 50mm and a minimum of 5mm, to provide a sound base.

**CHARACTERISTICS**

- ✓ Thickness from 5 – 50mm in one application
- ✓ Suitable for hand or pump application
- ✓ Low odour
- ✓ Protein free

**COVERAGE**

2.8m<sup>2</sup> at 5mm thickness

STOPGAP  
**MICRO RAPID**



**Floor Finishing Compound**

Rapid setting, rapid drying, flexible, floor finishing compound that incorporates the latest advances in cement technology providing a truly fast-track solution.

**GENERAL USE**

Suitable for light to medium traffic areas. Water mix, it requires no priming and can be trowel applied to form a feathered edge finish.

**CHARACTERISTICS**

- ✓ Rapid setting, rapid drying
- ✓ Suitable over plywood joints
- ✓ Protein free
- ✓ Low odour

**COVERAGE**

37.5m<sup>2</sup> Scratch Coat per 8kg unit

STOPGAP  
**700**  
SUPERFLEX



**Fibre-Reinforced Levelling Compound**

Based on the latest advances in cement and polymer technology, enabling fast track application prior to the installation of new floorcoverings.

**GENERAL USE**

Fast drying, flexible, fibre-reinforced self-levelling compound, designed specifically for use over plywood.

**CHARACTERISTICS**

- ✓ Approved for marine use
- ✓ Application thickness from 2 – 10mm
- ✓ Fibre reinforced for improved flexibility

**COVERAGE**

4.8m<sup>2</sup> at 3mm thickness

STOPGAP  
**SRS**



**Surface Reinforcement System**

A solvent free low viscosity two component renovation material designed to quickly stabilise and reinforce screeds comprising of cement and calcium sulphate, including those containing hot water heating pipes.

**GENERAL USE**

Readily fills voids and cracks resulting from poor placement and curing techniques of screeds.

**CHARACTERISTICS**

- ✓ Penetrates & reinforces weak & friable screeds
- ✓ Restore screeds overnight
- ✓ Suitable with underfloor heating systems

**COVERAGE**

3 – 5kg/m<sup>2</sup>

STOPGAP  
**800**  
WEARCOAT



**Self-Levelling Wearing Surface**

A self-levelling commercial and industrial grade floor compound for upgrading and renovating existing internal floors.

**GENERAL USE**

It is protein free, dimensionally stable and is designed for application between 5 – 15mm.

**CHARACTERISTICS**

- ✓ Application thickness from 5 – 15mm
- ✓ Excellent self-levelling properties
- ✓ Low odour
- ✓ Protein Free

**COVERAGE**

3m<sup>2</sup> at 5mm thickness

## STOPGAP SEAL



### For Use with Stopgap 800 Wearcoat

Clear, single component, water-dispersed polyurethane sealer designed to be applied to Stopgap 800 Wearcoat to protect the floor and ease maintenance by reducing the adhesion of dirt and other debris.

#### GENERAL USE

For use with Stopgap 800 Wearcoat to provide a hygienic and protective surface.

#### CHARACTERISTICS

- ✓ Quick drying
- ✓ Low odour

#### COVERAGE

10m<sup>2</sup> per litre

## STOPGAP I200 PRO



### High Performance Smoothing Compound

A low odour, fast setting, fast drying, two component smoothing compound suitable for preparing sound internal subfloors prior to the installation of new floorcoverings.

#### GENERAL USE

It is particularly suitable for use over old adhesive residues (including bitumen and carpet tile tackifiers) without the need for priming.

#### CHARACTERISTICS

- ✓ Application thickness from 2 – 10mm
- ✓ Can be filled up to 30mm
- ✓ Suitable direct to adhesive residues
- ✓ Lay floorcoverings from 4 hours

#### COVERAGE

5m<sup>2</sup> at 2 – 3mm thickness

## STOPGAP 850 EXTERIOR



### Exterior Levelling Compound

A non structural exterior grade levelling compound.

#### GENERAL USE

For use in light to medium duty applications to smooth and level rough or mechanically damaged concrete or sand/cement screeds that have become worn, impact damaged or weathered, such as balconies, patios, garages, walkways etc.

#### CHARACTERISTICS

- ✓ Application thickness from 5 – 15mm
- ✓ Can be filled up to 50mm
- ✓ Suitable for exterior use
- ✓ Protein free

#### COVERAGE

2.9m<sup>2</sup> at 5mm thickness

## STOPGAP I200



### Liquid

#### GENERAL USE

For use with Stopgap I200 powder only.

#### MIXING RATIO

5 litres to 20kg of powder

## STOPGAP 1100 GYPSUM



### Calcium Sulphate Based Levelling Compound

Stopgap 1100 Gypsum provides a smooth and level surface prior to the installation of new floorcoverings.

#### GENERAL USE

Designed specifically for use over calcium sulphate based screeds, such as anhydrite.

#### CHARACTERISTICS

- ✓ Application thickness from 2 – 10mm
- ✓ Can be filled up to 50mm
- ✓ Low pH
- ✓ Low odour

#### COVERAGE

5m<sup>2</sup> at 2 – 3mm thickness

## STOPGAP FILL & PRIME



### Flexible Cement Based Primer *Two Component*

Designed to have a thixotropic consistency which enables joints up to 4mm to be filled in raised access panels. Applied up to a thickness of 1mm, it sets rapidly and is ready to receive foot traffic in as little as 60 minutes. Once cured, the flexible nature of the product will accommodate movement within the substrate.

#### GENERAL USE

Suitable for use over raised access panels and substrates with well bonded, waterproof residues of adhesives prior to the direct application of Stopgap I200 PRO. It can be applied to flooring grade wooden substrates such as plywood, orientated strand board (OSB 3), particle board (chipboard) conforming to BSEN 312 Annex A P4-P7 and medium density fibreboard, prior to the application of Stopgap 700 Superflex. It may also be used to smooth out uneven tongue and groove floorboards prior to over boarding with plywood.

#### CHARACTERISTICS

- ✓ Fast drying
- ✓ Excellent flexibility
- ✓ Thixotropic to allow filling of joints up to 4mm wide

#### COVERAGE

8.5m<sup>2</sup> at 0.5mm thickness

	GENERAL PURPOSE LEVELLING COMPOUNDS			HIGH PERFORMANCE LEVELLING COMPOUNDS				HIGH PERFORMANCE LEVELLING COMPOUNDS			REPAIR AND FINISHING COMPOUNDS						
	Light/ Medium-Duty	Heavy-Duty															
	STOPGAP RED BAG	STOPGAP GREEN BAG	STOPGAP GREEN BAG	STOPGAP FAST-TRACK 30	STOPGAP 200 SMOOTH	STOPGAP 300 HD	STOPGAP 600 BASE (1)	STOPGAP 700 SUPERFLEX	STOPGAP 1100 GYPSUM	STOPGAP 1200 PRO	STOPGAP 400 REPAIR	STOPGAP 460 EXTERIOR REPAIR	STOPGAP 500 MICRO	STOPGAP MICRO RAPID	STOPGAP 800 WEARCOAT	STOPGAP 850 EXTERIOR	
	+ WATER	+ STOPGAP I28 LIQUID	+ STOPGAP I14 LIQUID	+ WATER	+ STOPGAP 200 ACRYLIC LIQUID	+ WATER	+ WATER	+ WATER	+ WATER	+ STOPGAP I200 LIQUID	+ WATER	+ WATER	+ WATER	+ WATER	+ WATER	+ WATER	
Product Features	Self-levelling Economy	Fast Setting Universal	Fast Setting Universal	Rapid Setting Rapid Drying	Acrylic Self-smoothing	Fast Drying Self-levelling	Thick Section Fast Drying	Flexible Fibre-reinforced	Compatible with calcium sulphate floors	Rapid Drying Self-smoothing	Slump Free Rapid Drying	Repair Mortar Exterior Use	Feather Edge Fast Drying	Feather Edge Rapid Drying	Wearing Surface Self-levelling	Exterior Use	
Working Time at 20°C (min)	15 – 25	15 – 20	15 – 20	10 – 15	20 – 30	20 – 30	20 – 30	20 – 30	20 – 30	15 – 20	10 – 15	10 – 15	15 – 20	10	20 – 30	10 – 15	
Time to Foot Traffic at 20°C – approx (hrs/min)	3hrs	90min	90min	30min	90min	90min	3hrs	60min	2hrs	60min	20 – 30min	60min	25min Micro-Coat	20min Scratch Coat	90min	2hrs	
Time to cover with a floorcovering or seal – approx (Hours)	Absorbent	24	24	12	45min	6	6	6 – 24 (1)	3	24 – 48	4	1 1/2 @ 2mm	24	25min Micro-Coat	20min Scratch Coat	6	24
	Non-absorbent	n/a	24	24	60min	12	12		4		n/a						
Application Thickness	Unfilled	Min (mm)	3	3	2 – 3	2 – 3	2 – 3	5	2 – 3	2 – 3	2 – 3	2 – 3	3	Micro-Coat	Scratch Coat	5	5
		Max (mm)	6	15	15	10	15	15	50	10	10	10	20	20	1	1	15
	Can be Filled	Up to 10mm	Up to 20mm	Up to 20mm	No	Up to 20mm	Up to 20mm	No	No	Up to 50mm	Up to 30mm	Up to 50mm	Up to 50mm	No	No	No	No
Suitable for Biologically Sensitive Areas	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Coverage at 3mm per bag (m <sup>2</sup> )	4.8	5.0	5.0	5.6 @ 2mm	4.8	5.0	2.8 @ 5mm	4.8	5.0	5.0 @ 2 – 3mm	n/a	n/a	n/a	n/a	3.0 @ 5mm	2.9 @ 5mm	
Suitable for Pump Application	Yes	No	No	No	No	Yes	Yes	No	Yes	No	No	No	No	No	Yes	Yes	
Suitable for High Temperature areas e.g. conservatories	No	No	No	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	No	No	Yes	Yes	
Compressive Strength 28 Day (N/mm <sup>2</sup> )	30	20	25	35	30	35	30	30	30	16	30	20	16	16	40	25	
Flexural Strength 28 Day (N/mm <sup>2</sup> )	5	5	7	10	7	8	7	10	7	6	4	5	6	6	10	6	
EN 13813 Class / EN 1504-3 Class	CT-C25-F5	CT-C20-F5	CT-C25-F7	CT-C35-F10	CT-C30-F7	CT-C35-F7	CT-C30-F7	CT-C30-F10	CA-C30-F7	CT-C16-F6	CT-C30-F4	Class R2	CT-C16-F6	CT-C16-F6	CT-C40-F10-AR0,5	Class R2	
<b>SUBFLOOR SUITABILITY + PRIMER RECOMMENDATION</b>																	
TYPE	Concrete, Sand/Cement Screeds and Other Solid Absorbent Surfaces	Dilute P131	Dilute P131	Dilute P131	Dilute P131	Dilute P131	Dilute P131	Dilute P131	Dilute P131 or Stopgap Fill and Prime	Dilute P121	Apply Direct or Dilute P131 (2)	Apply Direct to Damp Surface or Dilute P131	Apply Direct to Damp Surface or Dilute P131	Apply Direct to Surface	Apply Direct to Surface	Dilute P131	Double Prime Dilute P131
	Non-absorbent Surfaces e.g. Terrazzo, Ceramic Tiles	n/a	Neat P141	Apply Direct	Neat P141	Neat P141	Neat P141	Neat P141	n/a	Neat P141	Apply Direct	Neat P131 or Neat P141	n/a	n/a	n/a	Neat P141	Neat P141
	Power Floated Concrete (shot blasted)	n/a	Neat P141	Neat P141	Neat P141	Neat P141	Neat P141	Dilute P131	n/a	Neat P141	Apply Direct or Dilute P131 (2)	Apply Direct	n/a	n/a	n/a	Dilute P131 or Neat P141	Dilute P131
	Calcium Sulphate e.g. Anhydrite Screeds	n/a	P121 (6)	P121 (6)	P121 (6)	P121 (6)	P121 (6)	n/a	n/a	P121 (6)	P121 (6)	n/a	n/a	P121 (6)	P121 (6)	n/a	n/a
	Minimal Adhesive Residues on solid base	n/a	Neat P131	Apply Direct (2)	Neat P131	Neat P131	Neat P131	Neat P131	n/a	Neat P131	Apply Direct	Neat P131	n/a	n/a	n/a	n/a	n/a
	Stopgap F77 (F78 see (5))	n/a	Neat P141	Neat P141	Neat P141	Neat P141	Neat P141	Neat P141	Neat P141	Neat P141	P141 F77 Only (4)	Neat P141	n/a	n/a	n/a	Neat P141	n/a
	Flooring Grade Mastic Asphalt	n/a	Neat P141	Neat P141	n/a	Neat P141	Neat P141	n/a	n/a	Neat P141	Apply Direct	n/a	n/a	n/a	n/a	n/a	n/a
	Steel (non-flexing, corrosion free and clean)	n/a	Neat P141	Neat P141	Neat P141	Neat P141	Neat P141	Neat P141	Neat P141	n/a	Apply Direct	n/a	n/a	n/a	n/a	Neat P141	n/a
	Plywood Overlays	n/a	n/a	n/a	n/a	n/a	n/a	n/a	Dilute P131	n/a	n/a	n/a	n/a	Apply Direct	Apply Direct	n/a	n/a

THIS CHART IS FOR REFERENCE ONLY. ALWAYS REFER TO THE CURRENT TECHNICAL DATA SHEET, SUBFLOOR PREPARATION GUIDE AND/OR OUR TECHNICAL SERVICE DEPARTMENT FOR SPECIFIC GUIDANCE.  
 (1) STOPGAP 600 is designed to be used in conjunction with STOPGAP FAST-TRACK 30, STOPGAP 200, STOPGAP 300, STOPGAP 800 and STOPGAP I 200. Time to cover is therefore dependent on combination used.

(2) At least 75% of the subfloor must be exposed and sound.  
 (3) In certain situations priming may not be necessary, for example, when installing textile floorcoverings. However, we would recommend priming with STOPGAP P131 diluted to 4:1 with water to prevent uncontrolled drying of the compound, pin-holing and to aid the flow and workability.

(4) Within 24 hours and when not used in conjunction with Underfloor Heating.  
 (5) STOPGAP F78 Waterproof Surface Membrane does not require priming (within 12 hours of application) refer to Product Data Sheet or Technical Service.  
 (6) Please refer to the Stopgap P121 Product Data Sheet for the correct Mixing and Application method.

STOPGAP 300, STOPGAP 600, STOPGAP 700 and STOPGAP 1200 have been tested in accordance with and approved for use in marine application. n/a = not applicable or not recommended.





# DAMP OR CONTAMINATED Floor Solutions

## Key:

Open Time\*  
(minutes)



Drying Time\*  
(minutes)



Shelf Life



Pack Size



European Conformity



Application




TROWEL ROLLER BRUSH

F. Ball offers a complete system for the measurement and control of subfloor moisture. Subfloor moisture measurement tools include the Protimeter Aquant or MMS for instant indications of potential moisture levels. Full testing in accordance with British Standards can be carried out with the Digital Hygrometer. Remedial treatment for damp floors can be quickly and easily achieved with the range of Stopgap waterproof surface membranes or the 'loose lay' Isolator Membrane. Where contamination is a problem, Stopgap Isolator Membrane provides the answer once again by acting as a barrier between the contaminated subfloor and the new floorcovering.

\*Dependent on application and site conditions

## STOPGAP ISOLATOR



### Isolator Membrane

A loose lay, impervious laminated sheet, designed to provide a moisture barrier to subfloors which are damp and to those which can not be prepared by traditional methods, due to surface contamination.

#### GENERAL USE

The sheet provides a sub-base for the installation of numerous vinyl, linoleum and rubber sheet floorcoverings.

#### CHARACTERISTICS

- ✓ Provides a fast solution to laying a floorcovering over a damp floor
- ✓ Fit floorcoverings where the subfloor needs to be preserved in its original condition
- ✓ Flooring installation can be easily removed at the end of its life

#### COVERAGE

40m<sup>2</sup>

## STOPGAP JOINTING



### Jointing Tape

Stopgap Isolator Jointing tape is a thin metallised self-adhesive jointing tape that can be used to provide extra stability to the installation.

#### GENERAL USE

The use of this impervious tape along the seams of Stopgap Isolator Membrane provides additional protection in damp areas.

#### COVERAGE

50 linear metres

## STYCCOBOND

### F47



### Pressure Sensitive Adhesive

A solvent free acrylic polymer emulsion adhesive for vinyl floorcoverings.

#### GENERAL USE

To be used in conjunction with Isolator Jointing Tape to seal all joints in the Isolator Membrane. Can be used on subfloors with up to 92% Relative Humidity.

#### CHARACTERISTICS

- ✓ Pressure sensitive
- ✓ Solvent free
- ✓ Excellent plasticiser resistance

#### COVERAGE

3m<sup>2</sup> per litre  
Fine notch trowel (A1)  
5m<sup>2</sup> per litre  
1.5mm x 5mm trowel

# STOPGAP F77



## High Performance Waterproof Surface Membrane *One Coat Application System*

A solvent free two part epoxy resin system which cures to provide a waterproof surface membrane.

### GENERAL USE

It can be used to isolate residual construction moisture where relative humidity values are up to 98% or when there is no effective integral DPM and applied directly over underfloor heating screed with RH readings up to 90%.

### CHARACTERISTICS

- ✓ Use up to 98% RH with a single coat application
- ✓ Colour pigmented to aid coverage uniformity
- ✓ Can be applied direct over underfloor heating screeds using a coverage of 1.8m<sup>2</sup>/kg where readings are up to 90% RH

### COVERAGE

- 1.8m<sup>2</sup>/kg  
Applications up to 98% RH
- 1.8m<sup>2</sup>/kg  
Applications with underfloor heating up to 90% RH
- 2.5m<sup>2</sup>/kg  
Applications up to 85% RH

# STOPGAP F78



## High Performance Waterproof Surface Membrane *Two Coat Application System*

A solvent free, one component, ready to use system which dries rapidly to provide a waterproof surface membrane.

### GENERAL USE

STOPGAP F78 must be applied in two coats and can be used to isolate residual construction moisture where relative humidity values are up to 95%.

### CHARACTERISTICS

- ✓ Use up to 95% RH with a two coat application
- ✓ Colour pigmented to aid coverage uniformity
- ✓ No mixing required

### COVERAGE

- 3.3m<sup>2</sup>/kg as a two coat application  
Applications up to 95% RH

# STYCCOBOND F84



## Two Part Flooring Adhesive

A two part adhesive specifically designed to secure a range of sheet floorcoverings to the Stopgap Isolator Membrane. Suitable for use in areas that are subject to high levels of moisture. When cured it is resistant to water, oil and grease.

### GENERAL USE

Stopgap Isolator Membrane Adhesive, also suitable for some sheet vinyl, rubber and linoleum floorcoverings.

### CHARACTERISTICS

- ✓ Solvent free
- ✓ Can withstand wet cleaning
- ✓ Suitable for use over underfloor heating
- ✓ Resistant to oil, grease and water

### COVERAGE

- 3m<sup>2</sup> per kg  
1.5mm x 5mm trowel







# ANCILLARIES

Primers, Sealers, Cleaners,  
Tapes, Tools & Accessories

## Key:

Open Time\*  
(minutes)



Shelf Life



Pack Size



European  
Conformity



Application



TROWEL ROLLER BRUSH

\*Dependent on application and site conditions

## STYCCOBOND

# FI



## Rubber Latex Adhesive

Natural rubber latex, general-purpose adhesive.

### GENERAL USE

For seaming use in conjunction with an appropriate joining tape and to seal the edges of traditional carpets to prevent fibre loss.

### CHARACTERISTICS

- ✓ For seaming and sealing
- ✓ Can be used to prevent fibre loss

## STYCCO FLEX



## Rapid Curing Flexible Adhesive

A rapid curing flexible adhesive with excellent gap filling properties that is suitable for bonding a wide range of construction and building materials to most surfaces in both internal and external environments.

### GENERAL USE

Suitable for fixing carpet gripper, PVC cladding, skirting boards, architrave, trims and securing header rows when installing wood flooring. Stycco Flex can be used to install highly plasticised PVC flooring accessories and trims, including skirting, coving, capping and edging strips.

### CHARACTERISTICS

- ✓ Secure nosings from 1 hour
- ✓ Secure carpet gripper from 30 minutes
- ✓ Suitable for interior and exterior application

### COVERAGE

38 linear metres  
@ 3mm bead

## STYCCO SEAL



## Silicone Sealant

A one component silicone sealant. It cures by reacting with moisture in the air to form a tough, rubbery, waterproof bead and is suitable for exterior use.

### GENERAL USE

For sealing floorcoverings to sanitary ware, ceramic tiles, matwells, pipes, gutters, gulleys etc.

### CHARACTERISTICS

- ✓ Moisture curing
- ✓ Forms a tough, rubbery, waterproof bead
- ✓ Resistant to fungus

### COVERAGE

11 linear metres  
@ 6mm bead

## STOPGAP PI21



### Acrylic Primer

An acrylic primer designed to promote the adhesion of Stopgap levelling compounds over synthetic anhydrite screeds.

#### GENERAL USE

Calcium sulphate screeds (e.g anhydrite).

#### CHARACTERISTICS

- ✓ Pigmented to provide coverage control
- ✓ Prevents the rapid drying of adhesives and levelling compounds

#### COVERAGE

10m<sup>2</sup> per litre  
First coat diluted 1 part primer with 1 part water  
Second coat neat

## STOPGAP PI31



### General Purpose Primer

Neoprene emulsion primer designed to prevent rapid drying of adhesives and levelling compounds.

#### GENERAL USE

To promote adhesion of Stopgap levelling compounds to both absorbent and non-absorbent surfaces.

#### CHARACTERISTICS

- ✓ Suitable for use with F. Ball marine applications
- ✓ Pigmented to provide coverage control
- ✓ Prevents the rapid drying of adhesives and levelling compounds

#### COVERAGE

20m<sup>2</sup> – 35m<sup>2</sup> per litre  
When diluted with water\*  
10m<sup>2</sup> per litre  
Neat  
\*Refer to technical data sheet

## STOPGAP PI41



### Primer For Non-Absorbent Surfaces

An acrylic primer designed to provide a textured surface, to provide increased adhesion to floor levelling compounds.

#### GENERAL USE

To promote adhesion of Stopgap levelling compounds to non-absorbent surfaces.

#### CHARACTERISTICS

- ✓ Textured surface for increase adhesion
- ✓ Fast Drying
- ✓ Increased Coverage
- ✓ Pigmented to provide coverage control

#### COVERAGE

Up to 13m<sup>2</sup> per litre  
Neat

## STOPGAP FILL & PRIME



### Flexible Cement Based Primer *Two Component*

Designed to have a thixotropic consistency which enables joints up to 4mm to be filled in raised access panels. Applied up to a thickness of 1mm, it sets rapidly and is ready to receive foot traffic in as little as 60 minutes. Once cured, the flexible nature of the product will accommodate movement within the substrate.

#### GENERAL USE

Suitable for use over raised access panels and substrates with well bonded, waterproof residues of adhesives prior to the direct application of Stopgap 1200 PRO. It can be applied to flooring grade wooden substrates such as plywood, orientated strand board (OSB 3), particle board (chipboard) conforming to BSEN 312 Annex A P4-P7 and medium density fibreboard, prior to the application of Stopgap 700 Superflex. It may also be used to smooth out uneven tongue and groove floorboards prior to over boarding with plywood.

#### CHARACTERISTICS

- ✓ Fast drying
- ✓ Excellent flexibility
- ✓ Thixotropic to allow filling of joints up to 4mm wide

#### COVERAGE

8.5m<sup>2</sup> at 0.5mm thickness

## STYCCOCLEAN CI40



### Floor Cleaner

Concentrated alkaline liquid detergent for the removal of grease, oil and some adhesive. Can also be used to strip emulsion based polish from floorcoverings.

#### GENERAL USE

Asphalt, tarmac, concrete, sand/cement screed, granolithic, ceramic, quarry tiles and terrazzo.

#### CHARACTERISTICS

- ✓ Cleans a wide range of contaminants
- ✓ Suitable for use on a wide variety of floorcoverings

## STYCCOCLEAN SOLVENT



### Contaminant Remover

A non-flammable solvent.

#### GENERAL USE

Used for the removal of contaminants such as grease and oil from the back of floorcoverings and accessories prior to installation. Also assists in the removal of some adhesives from the surface of carpets and floorcoverings.

#### CHARACTERISTICS

- ✓ Fast drying
- ✓ Non-flammable
- ✓ Removes grease, oil and some adhesives
- ✓ Easy to apply

STYCCO  
**WIPES**



**Multi-Purpose Industrial Strength Cleaning Wipes (100 Wipes)**

Stycco-Wipes enhanced anti-bacterial formulation easily removes bacteria from hands and tools. Effective against MRSA, Salmonella, Listeria and E.Coli. Tested by independent laboratory to BS EN 12054 and BS 1276 standards.

**GENERAL USE**

Stycco-Wipes are specially formulated to remove adhesive, sealants, oil, grease, lacquer, tar bitumen, wet paint and more from hands and tools.

STOPGAP  
**AGGREGATE**



25KG

**Graded Aggregate**

For the application of thicker F. Ball compounds. Always refer to specific datasheets for particular compounds for suitability and thickness.

**GENERAL USE**

Filled compound mixes when using Stopgap Red Bag, Green Bag, 200, 300, 400, 460, 850, 1100 and 1200.



**MOISTURE MEASUREMENT**

Stopgap Digital Hygrometer	For the accurate measurement of moisture in subfloor base.
Butyl Tape	Spares for Hygrometer.
Tramex CMEX5	To determine the moisture content in concrete, sand/cement screeds, gypsum and timber.
Flooring Installers EZ Kit	
Protimeter Aquant™	For non-invasive rapid moisture testing of subfloor base.
Protimeter MMS2 Moisture Meter	For the indication of moisture in subfloor base.

**ADHESIVE APPLICATION**

Applicator Gun	For application of Stycco Seal & Stycco Flex cartridges.
Applicator Gun	For Styccobond B95 1kg sausage.
Dispenser Bottle	Applicator for Styccobond F30.
V Notched Trowels	Various sizes.
Spare Blades & Handles	Replacement trowel parts.
Safety Spreader	Fibre applicator for contact adhesives.
Plastic Notched Spreader	DIY adhesive applicator.

**LEVELLING COMPOUND APPLICATION**

Spiked Roller	Long handled roller used for the application of levelling compounds.
Scuttle	For use with the Stopgap Spiked Roller and roller applied products.
Smoothing Trowel	For the application of floor levelling compounds. 2 sizes: standard 280mm x 115mm & pointed nosed 400 x 115mm.
Mixing Bucket	Plastic bucket for the mixing of levelling compounds.
Measuring Bucket	For water measurement.
Power Whisk	For fast & efficient mixing of levelling compounds with an electric drill. 2 sizes: standard 80mm & large 100mm.

**FLOOR PREPARATION & ACCESSORIES**

1M Flat Wood Rule	Wooden measuring equipment.
Paint Roller	Long handled roller for the application of primers and sealers.
68KG Flooring Roller	Weighted metal roller used in the installation of floorcoverings.
Glyda	Floorcovering presser for foam backed carpet & felt back vinyl.
Araseur	Floorcovering trimmer with two blades.
Barrier Foam	2 sizes: (15 x 15mm & 30 x 30mm) x 1m long.
Spiked Shoes	Overshoes used when working with floor levelling compounds.
Knee Pads – PVC sponge cushion	Pair of protective knee pads.
Knee Pads – Leather felt cushion	Pair of protective knee pads.

**TAPES**

Impact Tape	3 sizes: (25mm, 50mm & 85mm) x 50m long. Double sided.
Gripsotape	50mm x 50m black coated single sided gaffer tape.
Amber Label Gripsotape	50mm x 50m double sided tape for securing PVC backed carpet tiles.
Green Label Gripsotape	50mm x 50m double sided tape for securing textile and bitumen felt backed carpet tiles.



# TRUST THE YELLOW BUCKET

## FLOOR LEVELLING IN A CLASS OF ITS OWN



- ✓ Unrivalled Value For Money
- ✓ No Primer Required
- ✓ Use Over Old Adhesive Residues
- ✓ Suitable for use under DPM's
- ✓ Fast Setting – Walk On After 60 minutes
- ✓ Fast Drying – Lay Coverings After 4 hours



A great finish starts with F. Ball



01538 361 633 • mail@f-ball.co.uk • www.f-ball.com/1200-GB



Exceptional quality, innovative products and support that you can always rely on.



F. Ball Always Gives You More



01538 361 633 • mail@f-ball.co.uk • www.f-ball.com





For further information about F. Ball products  
or technical advice please contact:



local stockist



F. Ball and Co. Ltd.

Churnetside Business Park  
Station Road  
Cheddleton  
Leek, Staffordshire  
ST13 7RS  
United Kingdom

Tel: +44 (0) 1538 361633  
Email: [mail@f-ball.co.uk](mailto:mail@f-ball.co.uk)

[www.f-ball.com](http://www.f-ball.com)

F. Ball and Co. (Asia) Pte Ltd.

50 Chin Swee Road  
#09-01 Thong Chai Building  
Singapore 169874

Tel: +65 6515 1715  
Mobile: +65 9687 9181  
Email: [mail@f-ballasia.com](mailto:mail@f-ballasia.com)



A  
GREAT BRITISH  
COMPANY